


Countersunk screws with form Z Pozidriv cross recess (countersunk head in accordance with ISO 7050)

● **BN 82427** | 400 HV case-hardened steel, blue-galvanised

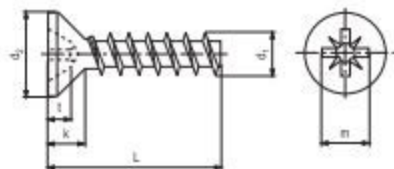

d	2,2	2,5	3	3,5	4	
d ₁	2,2	2,5	3	3,5	4	
d _{2 max}	3,8	4,7	5,5	7,3	8,4	
k max	1,2	1,5	1,65	2,35	2,7	
⊕	1	1	1	2	2	
m -	2,2	3	3,2	4,3	4,6	
t	min.	0,63	0,91	1	1,07	1,27
	max.	0,77	1,04	1,27	1,33	1,66

d	2,2	2,5	3	3,5	4
L	6	●	●		
	8	●	●	●	●
	10	●	●	●	●
	12	●	●	●	●
	14	●	●	●	●
	16	●	●	●	●
	20		●	●	●
	25		●	●	●